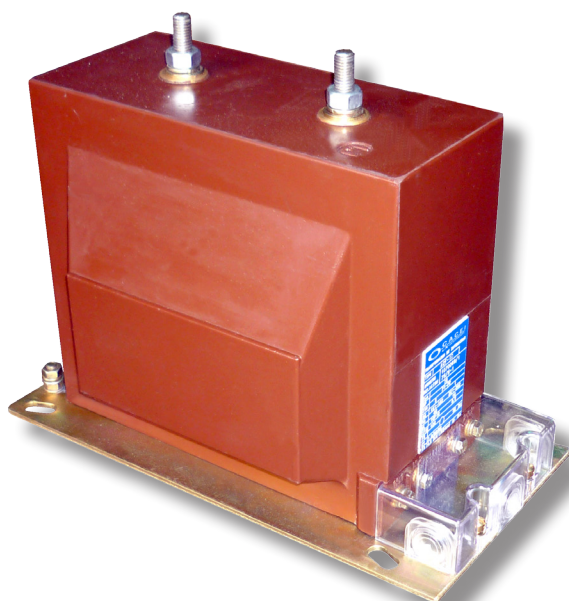


**APLICACION/APPLICATION**

Transformador de corriente para uso interior, valido para instrumentos de medición y relés.
Current Transformer designed for indoor service; suitable for operating measuring instruments and relays.

 AISLAMIENTO/ INSULATION

Vn:24kV ; BIL: 125kV (IEC)

Vn:25kV ; BIL: 150kV (IEEE)

DIMENSIONES/DIMENSIONS

Altura/Height: 245mm/9.64"

Ancho/Width: 178mm/7.00"

Profundidad/Depth: 350mm/13.78"

PESO/WEIGHT

27 Kg/59.52 Lbs

Descripcion General / General Description



Transformador de intensidad, tipo soporte, diseñado para servicio interior, encapsulado en resina.
Para medida y/o protección. Construibles bajo normas IEC e IEEE.
Otras normas o características especiales bajo consulta.

Current transformer, support-type, valid for indoor service, cast resin.
Designed for measurement and/or protection. Manufactured as per standard IEC and IEEE.
Other standards or special technical specification on request.

CLASES DE PRECISION ACCURACY CLASS		POTENCIAS DE PRECISION (VA) PARA LAS DIFERENTES INTENSIDADES TERMICAS (Ith) BURDENS (VA) FOR THE FOLLOWING THERMAL CURRENTS (Ith)												Nº de Secundarios Number of Secondaries	
NORMAS * STANDARD		100 kA		80 I _N		100 I _N		150 I _N		200 I _N		300 I _N			
		VA	BURDEN	VA	BURDEN	VA	BURDEN	VA	BURDEN	VA	BURDEN	VA	BURDEN		
IEC	IEEE	IEC	IEEE	IEC	IEEE	IEC	IEEE	IEC	IEEE	IEC	IEEE	IEC	IEEE	Medida Measure	Un Secundario Single Secondary
0,2	0,3	50	B2	50	B2	50	B2	30	B1	15	B0,1	5	B0,2		
0,5	0,6	50	B2	50	B2	50	B2	50	B2	50	B2	20	B0,5		
1	1,2	50	B2	50	B2	50	B2	50	B4	50	B2	50	B1		
5P5		50		50		50		50		50		50			
5P10		50		50		50		30		30		20			
5P20	RELAYS	50	C200	30	C200	30	C100	20	C100	15	C 50	10	C 50	Protection Protection	
0,2		50		30		20		5		5					
5P10		50		50		30		20		20					
0,2	0,3	50	B2	30	B1	10	B1	5	B0,2	5	B0,2				
5P20	RELAYS	30	C100	30	C100	15	C50	10	C 50	10	C 50				
0,5		50		20		30		15		15		5			
5P10		50		50		50		20		15		10		Medida +Protection Measure+Protection	Dos Secundarios Double Secondary
0,5	0,6	50	B2	50	B2	50	B2	15	B0,5	15	B0,5	5	B0,2		
5P20	RELAYS	30	C100	20	C100	30	C50	10	C 50	5	C 50	5	C 20		
Simple relacion primaria Single Primary Ratio		Hasta/To 2000A		Hasta/To 1200A		Hasta/To 1000A		Hasta/To 700A		Hasta/To 550A		Hasta/To 350A			
Doble relacion primaria Double Primary Ratio				Hasta/To 2x600A		Hasta/To 2x500A		Hasta/To 2x350A		Hasta/To 2x275A		Hasta/To 2x175A			

•Estas potencias son orientativas
•Posibilidad D.R.P. por toma en el secundario (consultar potencia).

•These rated outputs are orientative values.
•Possible D.P.R. by secondary tapping (consult burden).

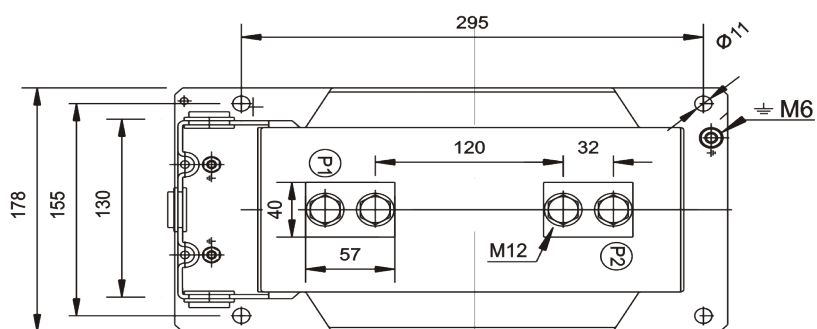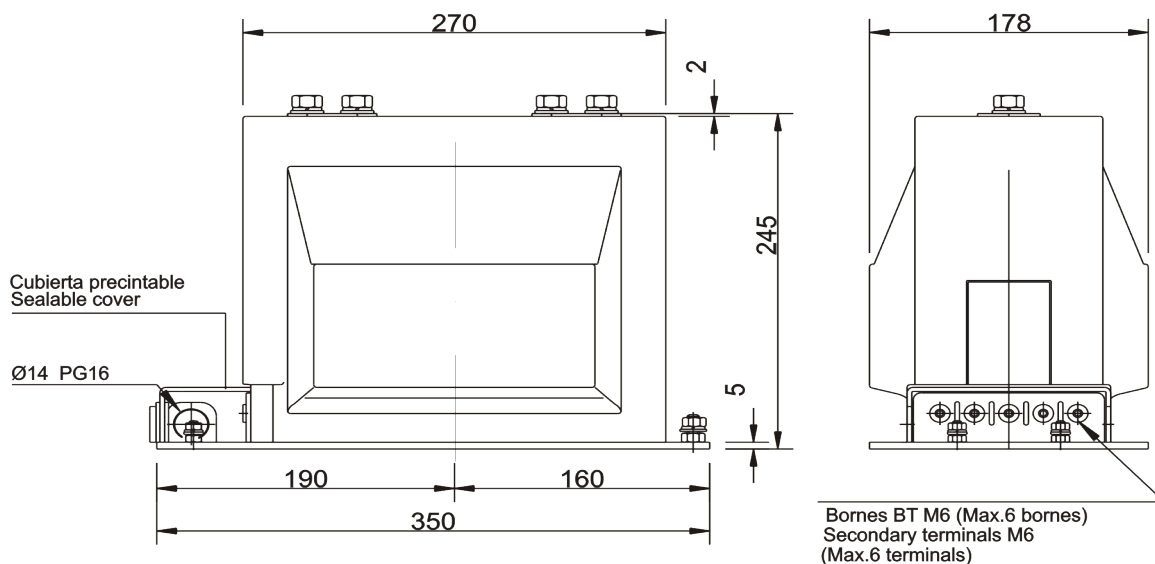

CASO S.R.P. SINGLE PRIMARY RATIO

Hasta 1500A IT <= 100 KA
Until

Marca A
Mark

Peso aprox./ Approx.weight: 27kg

CASO D.R.P. DOUBLE PRIMARY RATIO

Marca B
Mark

Hasta 2x300A IT. 30 KA
Until

CASO D.R.P. DOUBLE PRIMARY RATIO

Marca C
Mark

Hasta 2x600A IT. 60 KA
Until

